privod-okna.ru
+7 (495) 510-75-58
info@privod-okna.ru

ENGLISH

OT-3

5915024 JUL 2017

MANUFACTURER'S STATEMENT

1. Only use this product as specified in the operation manual provided.
2. Do not wash the product with water.
3. Do not disassemble, rebuild or repair the product yourself , otherwise electric shock may occur.
4. Do not use the product for safety / emergency switch.

SPECIFICATIONS

Model	: OT-3
Cover color	: Silver (Aluminium)
Output	: Normally open 24VDC Max. 5mA / 15VDC Max. 20mA (resistance load)
IP rate	: IP 55
Weight	: 90g(3.2oz)
Accessories	: 2 Mounting screws , 1 Mounting template , 1 Operation manual

NOTE The specifications herein are subject to change without prior notice due to improvements.

OUTER DIMENSIONS

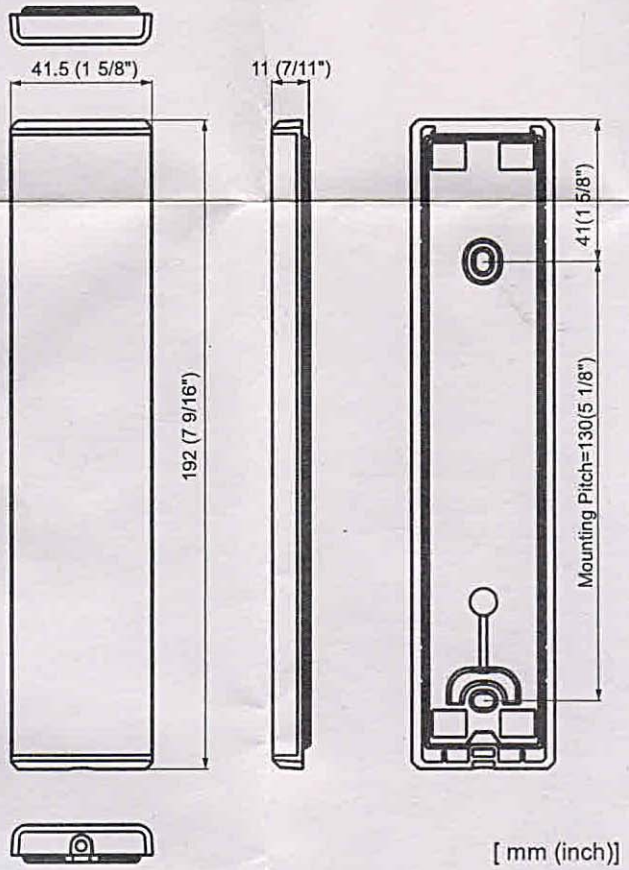

[mm (inch)]

INSTALLATION

1. Drill two mounting holes of ø3.4mm (ø1/8").
2. If wiring is to be concealed ,drill a distribution hole of ø5mm (ø3/16").
3. Remove the cover and fix the push button with the screws.
4. Put back the cover on the push button.
5. Attach the cover with the screw.

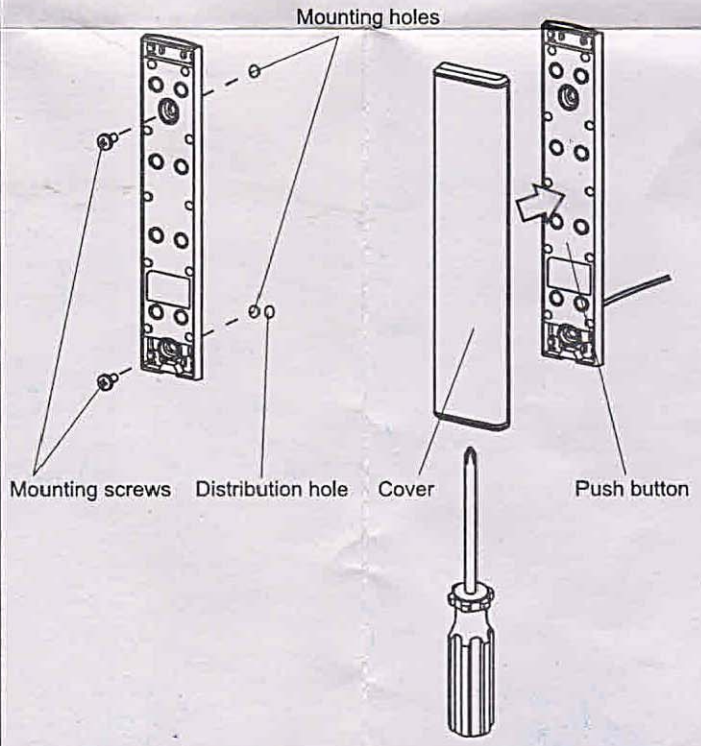

Manufacturer
OPTEX CO., LTD.
5-8-12 Ogoto Otsu 520-0101, Japan
TEL.: +81(0)77 579 8700 FAX.: +81(0)77 579 7030
WEBSITE: www.optex.net

European Subsidiary
OPTEX Technologies B.V.
Henricuskade 17, 2497 NB The Hague, The Netherlands
TEL.: +31(0)70 419 41 00 FAX.: +31(0)70 317 73 21
E-MAIL: info@optex.eu WEBSITE: www.optex.eu

North and South America Subsidiary
OPTEX INCORPORATED
18730 S. Wilmington Avenue, Suite 100 Rancho Dominguez CA 90220 U.S.A
TEL.: +1-800-877-6656 FAX.: +1(310)898-1098
WEBSITE: www.ot-inc.com

East coast office
8510 McAlpines Park Drive, Suite 108
Charlotte, NC 28211 U.S.A.
TEL.: +1-800-877-6656 FAX.: +1(704)365-0818
WEBSITE: www.ot-inc.com